

Standard Tube Benders

ROBEND® H+W PLUS

For exact cold bending up to 180°, of tubes made of

soft, semi-hard, hard copper
thin-walled coated copper
thin-walled aluminum and brass
precision steel
coated, seamless stainless steel

dia. 5/16" – 7/8" (8 mm – 22 mm)
dia. 3/8" – 5/8" (10 mm – 18 mm)
dia. 5/16" – 7/8" (8 mm – 22 mm)
dia. 3/8" – 5/8" (10 mm – 18 mm)
dia. 5/16" – 7/8" (8 mm – 22 mm)

Key features

- Eliminates purchase and storage of fittings
- 50% less soldering saves materials
- Increases safety by reducing number of joints
- Patented, ANTI-STICK ROLUB system



- Patented **ROLUB ANTI-STICK SYSTEM**:
42% less effort due to lower friction and optimum distribution of the bending spray


- Optimum combination of ROLUB guide shoe and bending former:
Bending without deformation and wrinkles with reduced effort

- Bending former with base plate:
To be clamped on the vice for easy bending

- Base plate can be attached with additional handle:
For free-hand bending up to dia. 5/8" (18 mm)

- Fork and former made of high quality forged aluminum:
Retains shape and is stable

- Reserve length table and bend radius scale on every former:
Exact bending

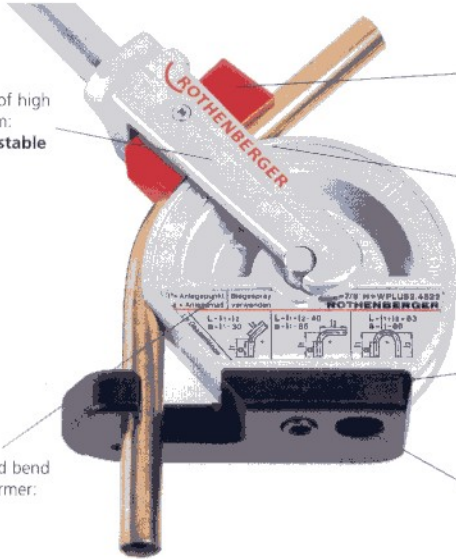

Vice bending



ROBEND® H+W PLUS Set


Set includes: benders corresponding to the various tube dimensions, bending spray 150 ml (25120), steel case

O.D.	Max in.	lb	No.
1/2", 5/8", 7/8"	0.04	30.3	24504

Suitable for construction sites




Various bends possible



ROBEND® H+W PLUS Bender

O.D.	Max. in.	R Radius in.	lb	No.
3/8"	0.04	1.26	9	24551
1/2"	0.04	1.50	3	24552
5/8"	0.04	2.52	15	24516
3/4"	0.04	3.19	13	24519
7/8"	0.04	3.19	11	24522

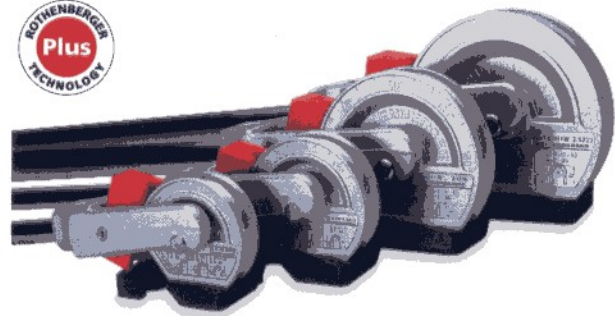

ROTHENBERGER.